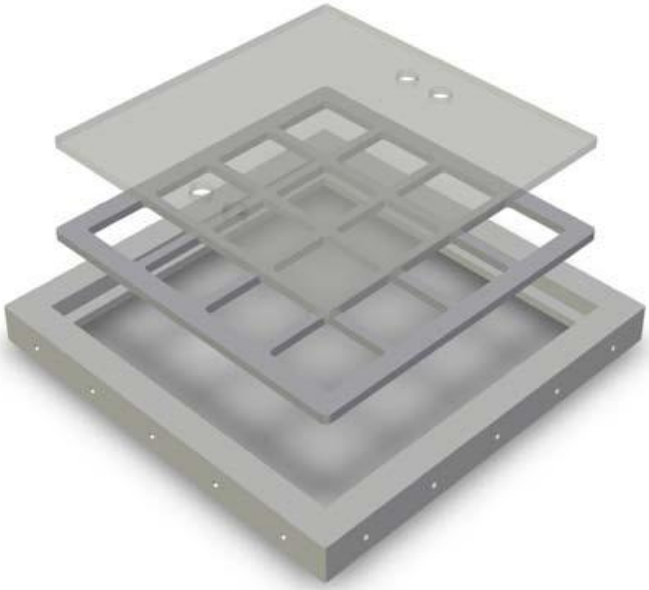

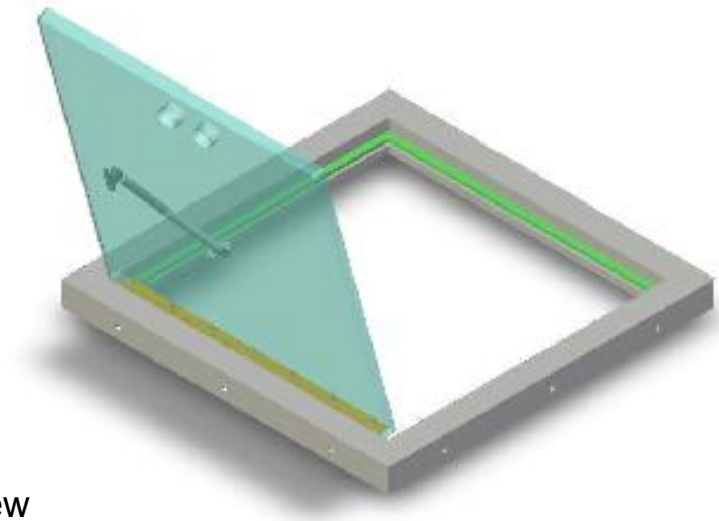

View Tile

The Invatech Engineering 24” x 24” View Tile for clean room raised floor systems is a strong, clean and low cost option to re-processing regular floor tiles into view tiles.

The main structure is 6061-T6 Aluminum. The frame is Type III hard anodized which results in a tough outer skin with excellent abrasion resistance, corrosion resistance, color fade resistance, dielectric strength, surface hardness and no exposed edges that can oxidize.

The view tile includes either a powder coated steel grate for safety and Lexan window, or just a Lexan lift off or hinged version. This results in an extraordinary weight rating (see back).

This multi-function view tile can also be used to hold gas and chemical VMB’s, electrical components and various other tool support equipment by attaching our floor box enclosure.

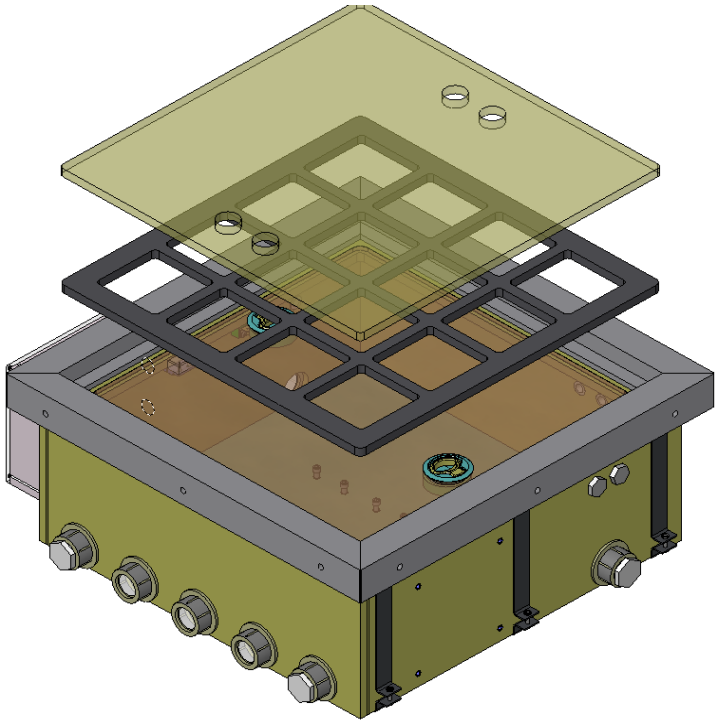

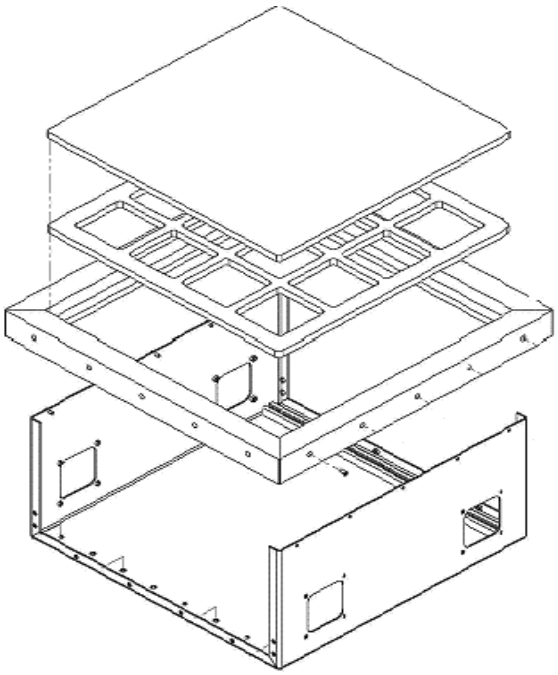

- The view tile is available with a ¾" Lexan window with optional hinge and position control arm or with ½" Lexan coupled with a steel safety grate.

  Invatech's view tile design has provisions for mounting enclosures or open frames as in the illustration above.

Model Number	Description	Max Load rating
INV-VT-SL-1	Steel Grate and lift off Lexan lid	750 lbs
INV-VT-L-1	Lexan lift off lid	1,100 lbs
INV-VT-LT-1	Lexan tilt up lid	1,100 lbs

Load ratings can be compared to the CISCA concentrated load data standard for use in a traditional 2' x 2' pedestal supported, stringerless raised access floor system. Load data is based on 1" x 1" load.